

Technical Specifications

Type: Gravity Table **Model:** KT




Description

The KT Model gravity table excels in removing specific light materials from bulk products, particularly effective when used after an air screener. It specializes in precision sorting by density, ensuring minimal yield loss of good products while accurately eliminating undesired materials. This efficient separation process not only enhances the purity but also the volume of the final output, making it essential for operations where quality and efficiency are paramount. This equipment is ideally suited for scenarios where specific light materials need to be removed.

Features

- Proven **durability** from the long history of sales
- **Full dust containment hood** keeps workplace clean
- **High capacity in a compact size**
- Evenly distributed air ensures **consistent cleaning**
- **2 cuts model**—efficiently target specific light materials

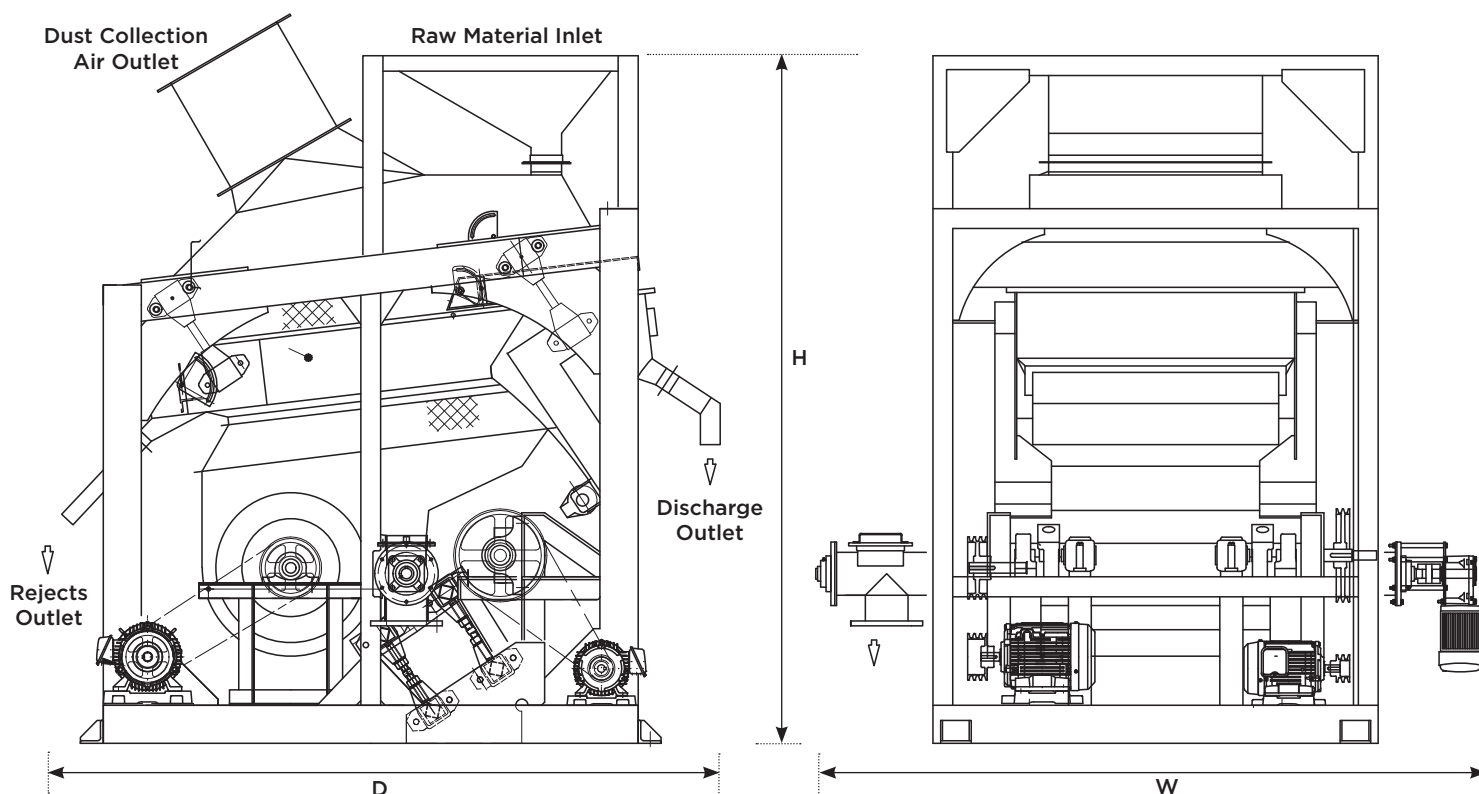

Model	Motor and Air Requirement	Cleaning Capacity*	Dimensions (DxHxW)
KT-10	Deck Motor 1 HP 6P (0.75kw) Fan Motor 5 HP 4P (3.7kw) 3 phase 220V 60 Hz Sucking Air Requirement: 120m ³ /min	185 – 296 bushel/hour 5 – 8 mt/hour	84 x 89 x 85 (inch) 2124 x 2250 x 2160 (mm)
KT-25	Deck Motor 2 HP 6p (1.5kw) Fan Motor 10 HP 4P (7.5kw) 3 phase 220V 60 Hz Sucking Air Requirement: 240m ³ /min	330 – 440 bushel/hour 9 – 12 mt/hour	84 x 89 x 121 (inch) 2124 x 2250 x 3070 (mm)

*Capacity varies depending on the materials and targets for cleaning.

Precision and Quality from Japan



 **US Nisshin Shokai**
Division Of Nisshin Shokai

1375 E.Woodfield Rd, Ste 250 • Schaumburg IL 60173
630-912-2150 • www.usnisshinsk.com
North American distributor for Harada Sangyo equipment.